


序号	详细型号	额定流量	额定压力	额定功率	额定转速	口径
		(L/s)	(Mpa)	kW	r/min	
177	XBD2.8/40G-BSL	40	0.28	30	2900	125
178	XBD3.2/40G-BSL	40	0.32	30	2900	125
179	XBD3.5/40G-BSL	40	0.35	30	2900	125
180	XBD4.0/40G-BSL	40	0.40	30	2900	125
181	XBD4.4/40G-BSL	40	0.44	30	2900	125
182	XBD4.5/40G-BSL	40	0.45	37	2900	125
183	XBD5.0/40G-BSL	40	0.50	37	2900	125
184	XBD5.5/40G-BSL	40	0.55	45	2900	125
185	XBD6.0/40G-BSL	40	0.60	45	2900	125
186	XBD6.5/40G-BSL	40	0.65	45	2900	125
187	XBD7.0/40G-BSL	40	0.70	45	2900	125
188	XBD7.5/40G-BSL	40	0.75	45	2900	125
189	XBD8.0/40G-BSL	40	0.80	55	2900	125
190	XBD8.5/40G-BSL	40	0.85	55	2900	125
191	XBD9.0/40G-BSL	40	0.90	55	2900	125
192	XBD9.5/40G-BSL	40	0.95	75	2900	125
193	XBD10.0/40G-BSL	40	1.00	75	2900	125
194	XBD10.5/40G-BSL	40	1.05	75	2900	125
195	XBD11.0/40G-BSL	40	1.10	75	2900	125
196	XBD11.5/40G-BSL	40	1.15	90	2900	125
197	XBD12.0/40G-BSL	40	1.20	90	2900	125
198	XBD12.5/40G-BSL	40	1.25	90	2900	125
199	XBD13.0/40G-BSL	40	1.30	90	2900	125
200	XBD14.0/40G-BSL	40	1.40	110	2900	125
201	XBD14.5/40G-BSL	40	1.45	110	2900	125
202	XBD15.0/40G-BSL	40	1.50	110	2900	150
203	XBD15.5/40G-BSL	40	1.55	132	2900	150
204	XBD2.5/45G-BSL	45	0.25	22	2900	150
205	XBD3.0/45G-BSL	45	0.30	22	2900	150
206	XBD3.5/45G-BSL	45	0.35	30	2900	150
207	XBD4.0/45G-BSL	45	0.40	30	2900	150
208	XBD4.2/45G-BSL	45	0.42	30	2900	150
209	XBD4.5/45G-BSL	45	0.45	37	2900	150
210	XBD4.9/45G-BSL	45	0.49	37	2900	150
211	XBD5.0/45G-BSL	45	0.50	37	2900	150
212	XBD5.5/45G-BSL	45	0.55	37	2900	150
213	XBD6.0/45G-BSL	45	0.60	45	2900	150
214	XBD6.5/45G-BSL	45	0.65	45	2900	150
215	XBD7.0/45G-BSL	45	0.70	45	2900	150
216	XBD7.5/45G-BSL	45	0.75	45	2900	150
217	XBD8.0/45G-BSL	45	0.80	55	2900	150
218	XBD8.5/45G-BSL	45	0.85	55	2900	150
219	XBD8.6/45G-BSL	45	0.86	55	2900	150
220	XBD9.0/45G-BSL	45	0.90	55	2900	150

序号	详细型号	额定流量	额定压力	额定功率	额定转速	口径
		(L/s)	(Mpa)	kW	r/min	
221	XBD9.5/45G-BSL	45	0.95	55	2900	150
222	XBD10.0/45G-BSL	45	1.00	75	2900	150
223	XBD10.6/45G-BSL	45	1.06	75	2900	150
224	XBD11.0/45G-BSL	45	1.10	75	2900	150
225	XBD12.0/45G-BSL	45	1.20	90	2900	150
226	XBD13.0/45G-BSL	45	1.30	90	2900	150
227	XBD14.0/45G-BSL	45	1.40	110	2900	150
228	XBD15.0/45G-BSL	45	1.50	132	2900	150
229	XBD3.0/50G-BSL	50	0.30	30	2900	150
230	XBD3.5/50G-BSL	50	0.35	37	2900	150
231	XBD4.0/50G-BSL	50	0.40	37	2900	150
232	XBD4.2/50G-BSL	50	0.42	37	2900	150
233	XBD4.6/50G-BSL	50	0.46	45	2900	150
234	XBD5.0/50G-BSL	50	0.50	45	2900	150
235	XBD5.5/50G-BSL	50	0.55	45	2900	150
236	XBD5.8/50G-BSL	50	0.58	45	2900	150
237	XBD6.0/50G-BSL	50	0.60	45	2900	150
238	XBD6.5/50G-BSL	50	0.65	55	2900	150
239	XBD7.0/50G-BSL	50	0.70	55	2900	150
240	XBD7.5/50G-BSL	50	0.75	75	2900	150
241	XBD8.0/50G-BSL	50	0.80	75	2900	150
242	XBD8.5/50G-BSL	50	0.85	75	2900	150
243	XBD9.0/50G-BSL	50	0.90	75	2900	150
244	XBD10.0/50G-BSL	50	1.00	90	2900	150
245	XBD11.0/50G-BSL	50	1.10	90	2900	150
246	XBD11.5/50G-BSL	50	1.15	90	2900	150
247	XBD11.7/50G-BSL	50	1.17	90	2900	150
248	XBD12.0/50G-BSL	50	1.20	110	2900	150
249	XBD13.0/50G-BSL	50	1.30	110	2900	150
250	XBD14.0/50G-BSL	50	1.40	132	2900	150
251	XBD15.0/50G-BSL	50	1.50	132	2900	150
252	XBD3.5/60G-BSL	60	0.35	37	2900	150
253	XBD4.0/60G-BSL	60	0.40	45	2900	150
254	XBD4.5/60G-BSL	60	0.45	45	2900	150
255	XBD5.0/60G-BSL	60	0.50	55	2900	150
256	XBD5.5/60G-BSL	60	0.55	55	2900	150
257	XBD6.0/60G-BSL	60	0.60	55	2900	150
258	XBD6.5/60G-BSL	60	0.65	75	2900	150
259	XBD7.0/60G-BSL	60	0.70	75	2900	150
260	XBD7.8/60G-BSL	60	0.78	75	2900	150
261	XBD8.0/60G-BSL	60	0.80	75	2900	150
262	XBD8.5/60G-BSL	60	0.85	90	2900	150
263	XBD9.0/60G-BSL	60	0.90	90	2900	150
264	XBD9.6/60G-BSL	60	0.96	90	2900	150

序号	详细型号	额定流量	额定压力	额定功率	额定转速	口径
		(L/s)	(Mpa)	kW	r/min	
265	XBD10.0/60G-BSL	60	1.00	90	2900	150
266	XBD11.0/60G-BSL	60	1.10	110	2900	150
267	XBD12.0/60G-BSL	60	1.20	132	2900	150
268	XBD13.0/60G-BSL	60	1.30	160	2900	150
269	XBD14.0/60G-BSL	60	1.40	160	2900	150
270	XBD4.0/70G-BSL	70	0.40	55	2900	150
271	XBD5.0/70G-BSL	70	0.50	55	2900	150
272	XBD6.0/70G-BSL	70	0.60	75	2900	150
273	XBD7.0/70G-BSL	70	0.70	75	2900	150
274	XBD8.0/70G-BSL	70	0.80	90	2900	150
275	XBD9.0/70G-BSL	70	0.90	110	2900	150
276	XBD10.0/70G-BSL	70	1.00	132	2900	150
277	XBD11.0/70G-BSL	70	1.10	132	2900	150
278	XBD12.0/70G-BSL	70	1.20	160	2900	150
279	XBD14.0/70G-BSL	70	1.40	200	2900	150
280	XBD4.0/80G-BSL	80	0.40	55	2900	200
281	XBD5.0/80G-BSL	80	0.50	75	2900	200
282	XBD6.0/80G-BSL	80	0.60	90	2900	200
283	XBD7.0/80G-BSL	80	0.70	110	2900	200
284	XBD8.0/80G-BSL	80	0.80	132	2900	200
285	XBD9.0/80G-BSL	80	0.90	132	2900	200
286	XBD10.0/80G-BSL	80	1.00	132	2900	200
287	XBD12.0/80G-BSL	80	1.20	160	2900	200
288	XBD14.0/80G-BSL	80	1.40	200	2900	200
289	XBD4.0/90G-BSL	90	0.40	75	2900	200
290	XBD5.0/90G-BSL	90	0.50	90	2900	200
291	XBD6.0/90G-BSL	90	0.60	110	2900	200
292	XBD7.0/90G-BSL	90	0.70	110	2900	200
293	XBD8.0/90G-BSL	90	0.80	132	2900	200
294	XBD9.0/90G-BSL	90	0.90	160	2900	200
295	XBD10.0/90G-BSL	90	1.00	160	2900	200
296	XBD11.0/90G-BSL	90	1.10	160	2900	200
297	XBD12.0/90G-BSL	90	1.20	200	2900	200
298	XBD13.0/90G-BSL	90	1.30	250	2900	200
299	XBD14.0/90G-BSL	90	1.40	280	2900	200
300	XBD5.0/100G-BSL	100	0.50	160	2900	200
301	XBD6.0/100G-BSL	100	0.60	160	2900	200
302	XBD7.0/100G-BSL	100	0.70	160	2900	200
303	XBD9.0/100G-BSL	100	0.90	160	2900	200
304	XBD10.0/100G-BSL	100	1.00	250	2900	200
305	XBD11.0/100G-BSL	100	1.10	250	2900	200
306	XBD12.0/100G-BSL	100	1.20	250	2900	200
307	XBD13.0/100G-BSL	100	1.30	280	2900	200
308	XBD14.0/100G-BSL	100	1.40	280	2900	200

► XBD-G(W)-BSL 型消防泵外形及安装示意图

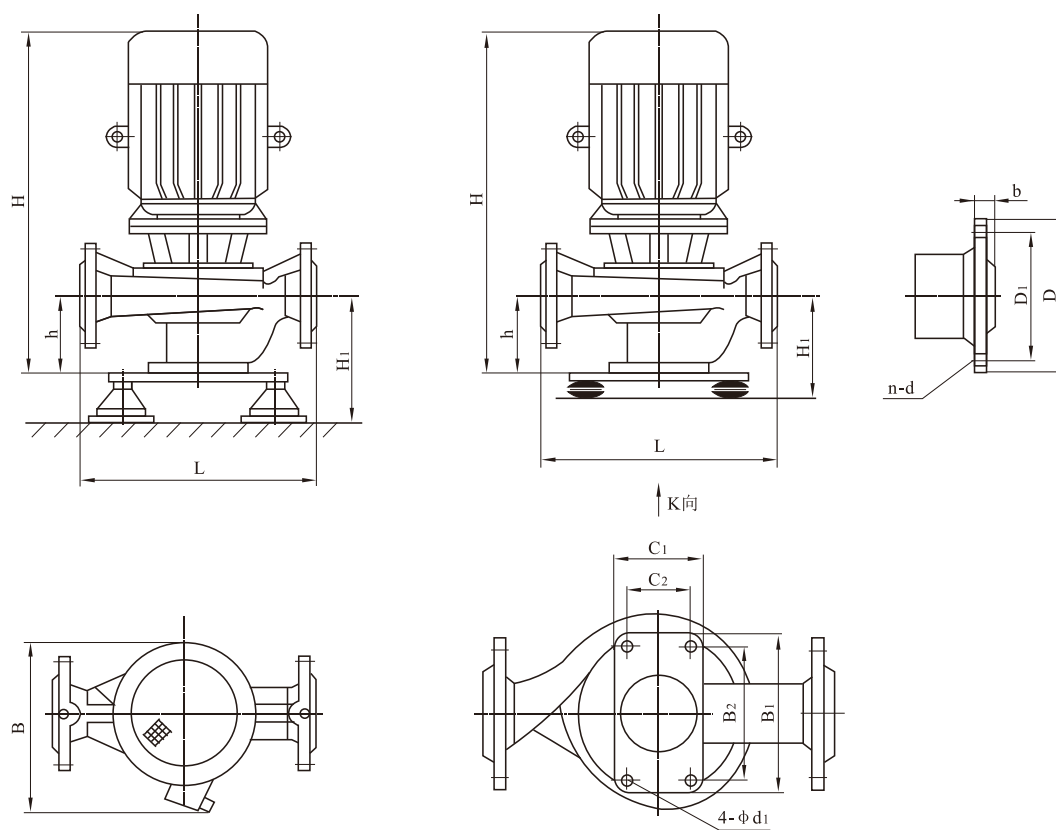


注：尺寸仅供参考，以厂家提供外形尺寸图为准。

► 泵的安装形式示意图


一、硬性联接

1、直接安装

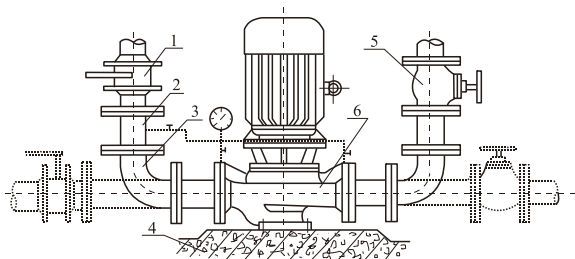

- 1、进口阀门 2、取压直管
5、出口阀门


2、联接板安装

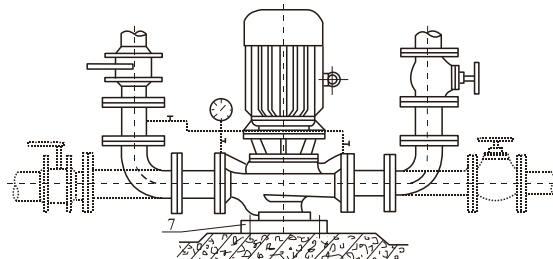

- 3、弯管 4、水泥浇注基础
6、泵 7、联接板


二、柔性联接

1、配联接板，加隔振器安装

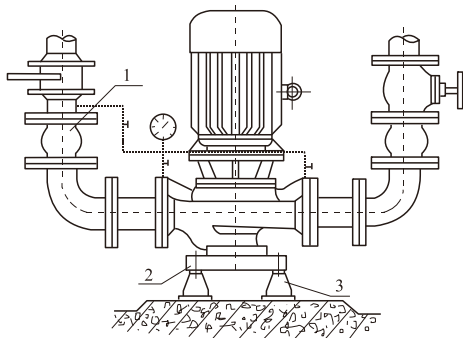


- 1、挠性接头 2、联接板
4、SD型隔振垫

2、配联接板加隔振垫安装

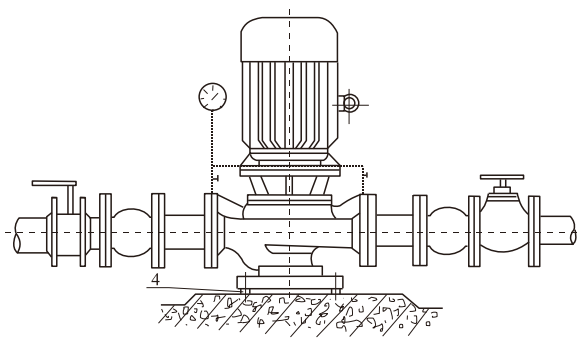


- 3、JG型隔振器

3、户外使用，采用IP54电机(户外型)

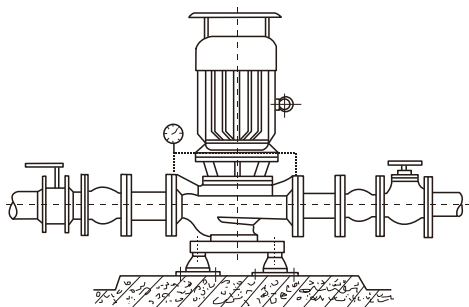


4、悬臂卧式使用安装

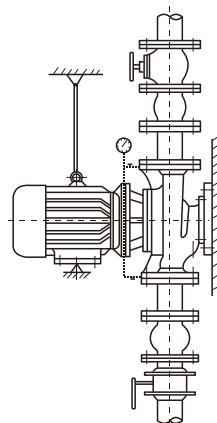


注：隔振器用膨胀螺栓固定在基础上

► 附件及安装基础示意图

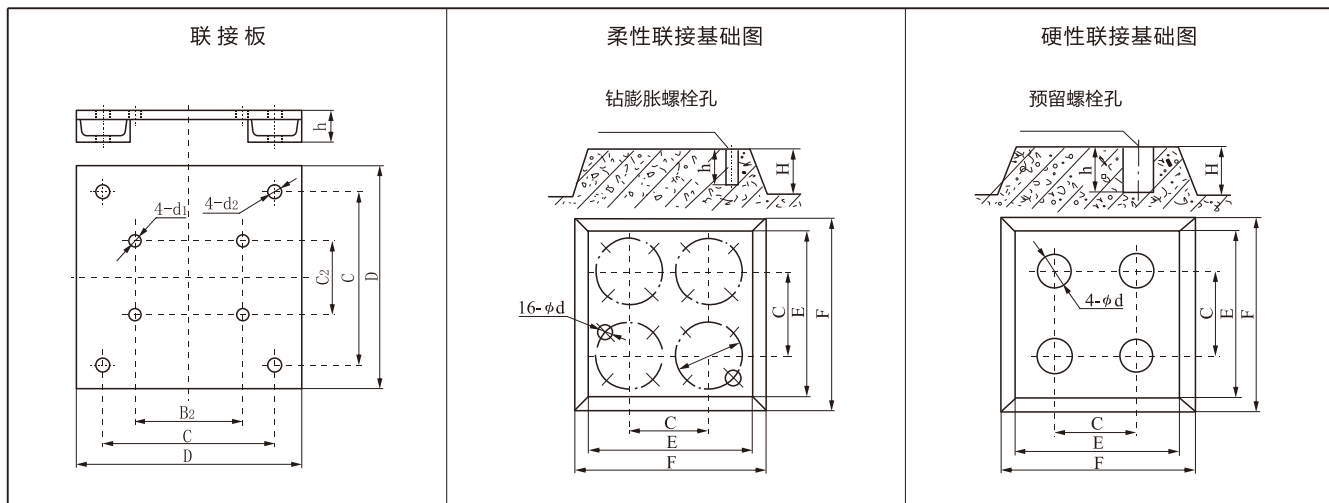


型 号	联接板尺寸						柔性联接基础尺寸						硬性联接基础尺寸						
Type	B ₂ ×C ₂	C×C	D×D	h	d ₁	d	H	E	F	C	φ D	φ d	h	H	E	F	C	φ d	h
SLS-1	120×70	240×240	300×300	55	φ 14	φ 12	200	450	500	240	/	/	/	100	450	500	240	60	200
SLS-2	130×80	240×240	300×300	55	φ 14	φ 12	200	450	500	240	/	/	/	100	450	500	240	60	200
SLS-3	160×100	340×340	400×400	55	φ 18	φ 14	250	650	700	340	同 隔 振 器 D ₁	φ 14.5	60	150	650	700	340	80	250
SLS-4	180×120	340×340	400×400	55	φ 18	φ 14	250	650	700	340		φ 14.5	60	150	650	700	340	80	250
SLS-5	200×140	340×340	400×400	55	φ 22	φ 18	250	650	700	340		φ 14.5	60	150	650	700	340	80	250
SLS-6	220×160	340×340	400×400	55	φ 22	φ 18	250	650	700	340		φ 14.5	60	150	650	700	340	80	250
SLS-7	240×120	340×340	400×400	55	φ 22	φ 18	250	650	700	340		φ 14.5	60	150	650	700	340	80	250
SLS-8	260×210	440×440	500×500	55	φ 22	φ 18	300	750	800	440		φ 14.5	60	200	750	800	440	80	250
SLS-9	280×190	440×440	500×500	55	φ 22	φ 18	300	750	800	440		φ 14.5	60	200	750	800	440	80	250
SLS-10	280×200	440×440	500×500	55	φ 22	φ 18	300	750	800	440		φ 14.5	60	200	750	800	440	80	250
SLS-11	280×230	440×440	500×500	55	φ 22	φ 18	300	750	800	440		φ 14.5	60	200	750	800	440	80	250
SLS-12	300×250	540×540	600×600	55	φ 22	φ 18	300	850	950	540		φ 14.5	60	200	850	950	540	80	250
SLS-13	350×300	540×540	600×600	55	φ 22	φ 18	300	850	950	540		φ 14.5	60	200	850	950	540	80	250
SLS-14	400×300	740×740	800×800	55	φ 26	φ 22	350	1000	1100	740		φ 14.5	60	250	1000	1000	740	80	300
SLS-15	430×330	740×740	800×800	55	φ 26	φ 22	350	1000	1100	740		φ 14.5	60	250	1000	1100	740	80	300
SLS-16	450×350	740×740	800×800	55	φ 26	φ 22	350	1000	1100	740		φ 14.5	60	250	1000	1100	740	80	300
SLS-17	450×400	740×740	800×800	55	φ 26	φ 22	350	1000	1100	740		φ 14.5	60	250	1000	1100	740	80	300
SLS-18	480×430	840×840	900×900	55	φ 26	φ 22	350	1200	1300	840		φ 14.5	60	250	1200	1300	840	80	300
SLS-19	480×400	740×740	800×800	55	φ 26	φ 22	350	1000	1100	740		φ 14.5	60	250	1000	1100	740	80	300

JG型隔振器安装尺寸

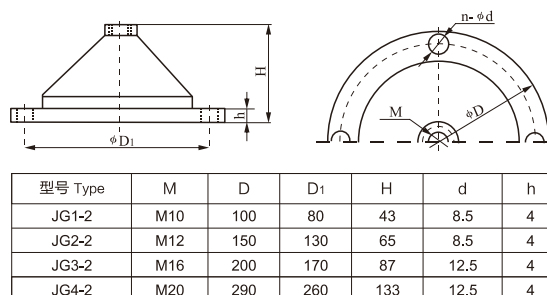

SD隔振垫

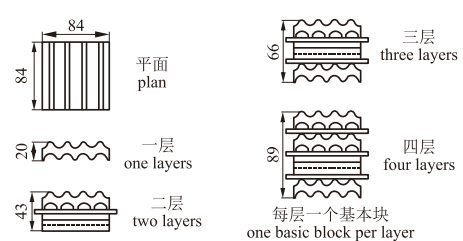

SHANGHAI BOSHUI
PUMP MFG.CO.,LTD.



上海博水泵业制造有限公司
SHANGHAI BOSHUI PUMP MFG. CO., LTD.

● 地址：上海市奉贤区四团工业园区平福路1236号
● 电话：021-57562881/57562882
● 手机：13391222881 13391222882
● 传真：021-57562882
● 网址：WWW.boshui88.com